

Temperature head Transmitter TMT191B



Universal head transmitter for resistance thermometers (RTD), thermocouples (TC), resistance, voltage transmitters, for installation in a sensor head (Form B)

Application areas

- Temperature head transmitter for converting various input signals into a scalable 4 to 20 mA analogue output signal
- Input
 - Resistance thermometer (RTD)
 - Thermocouple (TC)
 - Resistance transmitter (Ω)
 - Voltage transmitter (mV)

Performance

- 2 wire technology, 4 to 20mA analogue output
- High accuracy in total ambient temperature range
- Galvanic isolation
- An internal temperature sensor for active temperature compensation(For T/C)
- Wide voltage supply range
- Expanded resistance input (max 2K Ω)
- Expanded voltage input (max 2KmV)

Technical data

Power supply	
Supply voltage	7.5 to 45 VDC (without display), polarity protected
Output	
Output signal	4 to 20 mA
Signal on alarm	Underranging Linear drop to 3.8 mA Overranging linear rise to 20.5 mA Sensor break; sensor open-circuit 3.6 mA
Load	max. $(V_{\text{power supply}} - 7.5 \text{ V})/0.022 \text{ A}$
Linearisation/transmission behaviour	Temperature linear, resistance linear, voltage linear
Galvanic isolation	U=2000V AC (input/output)
Installation conditions	
Installation instructions	Installation angle: no limit Installation area: Connection head accord. To DIN 43 729 Form B; TAF 10 field housing



Input			
Input	Type	Measurement ranges	Min.meas.Ranges
Resistance thermometer(RTD)	Pt100	-200°C to 850°C (-328°F to 1562°F)	10K
	Pt500	▲ -200°C to 250°C (-328°F to 482°F)	10K
	Pt1000	▲ -200°C to 250°C (-328°F to 482°F)	10K
	Cu50	-50°C to 150°C (-58°F to 302°F)	10K
	Cu100	-50°C to 150°C (-58°F to 302°F)	10K
	*Ni100	-60°C to 180°C (-76°F to 356°F)	10K
	*Ni500	▲ -60°C to 180°C (-76°F to 356°F)	10K
	*Ni1000	▲ -60°C to 150°C (-76°F to 302°F)	10K
	Resistance transmitter	0 to 400 Ω ▲ 0 to 2000 Ω	10 Ω 20 Ω
Connection type:2-,3- or 4-wiere connection			
Thermocouples(TC)	B(PtRh30-PtRh6)	0 to 1820°C (-32 to 3308°F)	500K
	E(NiCr-CuNi)	-270 to 1000°C (-454 to 1832°F)	50K
	J(Fe-CuNi)	-210 to 1200°C (-346 to 2192°F)	50K
	K(NiCr-Ni)	-270 to 1372°C (-454 to 2501°F)	50K
	N(NiCrSi-NiSi)	-270 to 1300°C (-454 to 2372°F)	50K
	R(PtRh13-Pt)	-50 to 1768°C (-58 to 3214.4°F)	500K
	S(PtRh10-Pt)	-50 to 1768°C (-58 to 3214.4°F)	500K
	T(Cu-CuNi)	-270 to 400°C (-454 to 752°F)	50K
	Millivolt transmitter(mV)	-10 to 75mV ▲ -100 to 100mV ▲ -100 to 500mV ▲ -100 to 2000mV	5mV 5mV 6mV 20mV
▲ on request			
Performance characteristics			
Response time	1 s		
Reference operating conditions	Calibration temperature: 23°C (73.4°F) 5K		
Long term stability	≤0.05%/year		
Switch on delay	≤5s		
Influence of ambient	Negligible		
Load influence	Negligible		
Power supply influence	Negligible		
Self stability configuration	0 to 2%		
Filter configuring	0 to 160 μ A		
Resolution	0.3 μ A		
Maximum measured error	Input	Type	Measurement accuracy
	RTD	Pt100, Ni100	0.2K or 0.08%
		Pt500, Ni500	0.5K or 0.20%
		Pt1000, Ni1000	0.3K or 0.12%
		Cu50	0.2K or 0.08%
	TC	Cu100	0.3K or 0.12%
		K, J, T, E	typ.0.5K or 0.08%
		N	typ.1.0K or 0.08%
	Ω	S, B, R	typ.2.0K or 0.08%
		0 to 400 Ω	± 0.1Ω or 0.08%
		0 to 2000 Ω	± 1.5Ω or 0.12%
	mV	-10 to 75mV -100 to 100mV -100 to 500mV -100 to 2000mV	± 20 μ V or 0.08% ± 0 μ V or 0.08% ± 0 μ V or 0.08% ± 0 μ V or 0.08%

Environment conditions


Ambient temperature limits	-40 to 85°C (-40°F to 185°F)
Storage temperature	-40 to 100°C (-40°F to 212°F)
Condensation	Allowable
Degree of protection	IP 00, IP66 (installed)
Shock and vibration resistance	4g/2 to 150 Hz as per IEC 60 068-26
Electromagnetic compatibility(EMC)	Interference immunity and interference emission according to GB/T17626.2-1998), compliance with IEC 61000-4-3:1995.
Explosion	Intrinsically safe: Exia II CT4

Others


Dimensions	Dia. 44 mm X 24 mm
Weight	Approx. 34g
Material	Housing: PC Potting: epoxy

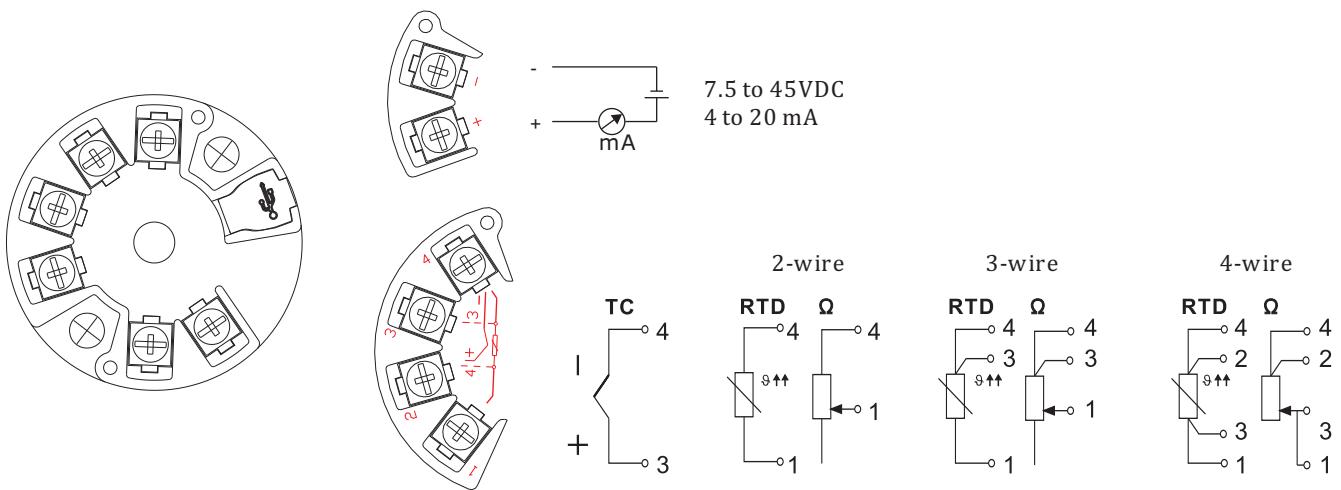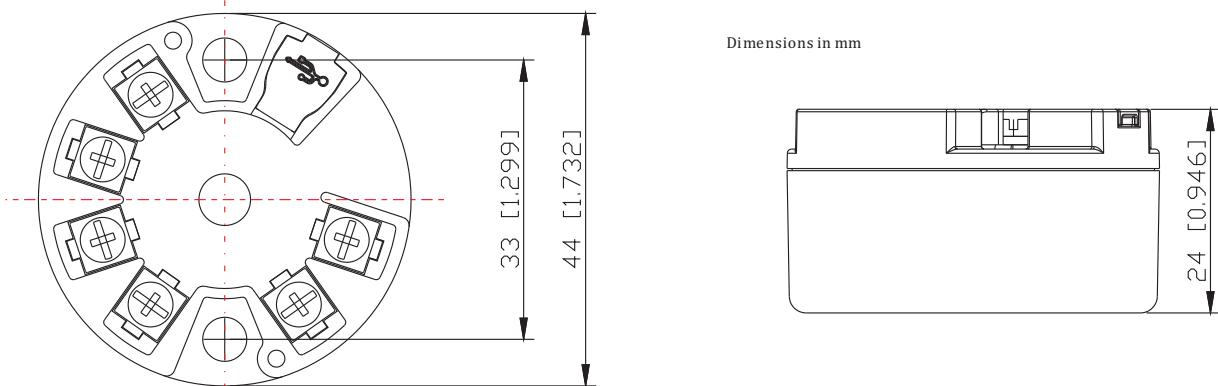Electrical connections**Dimensions**

How to programme

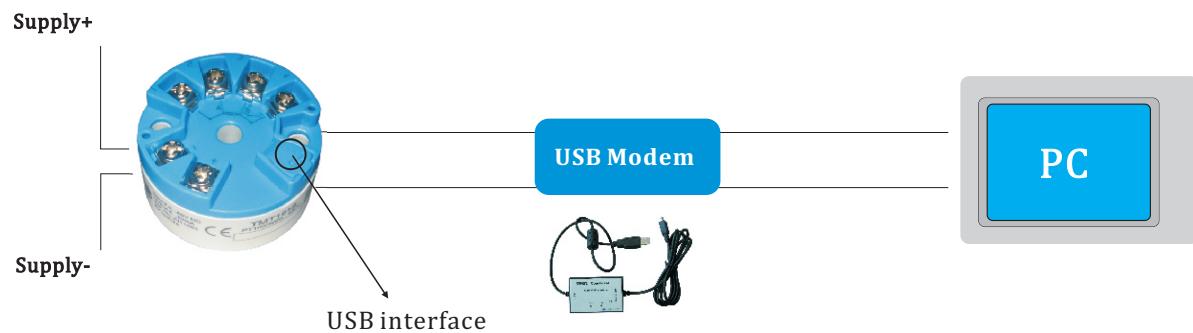

Installation diagram

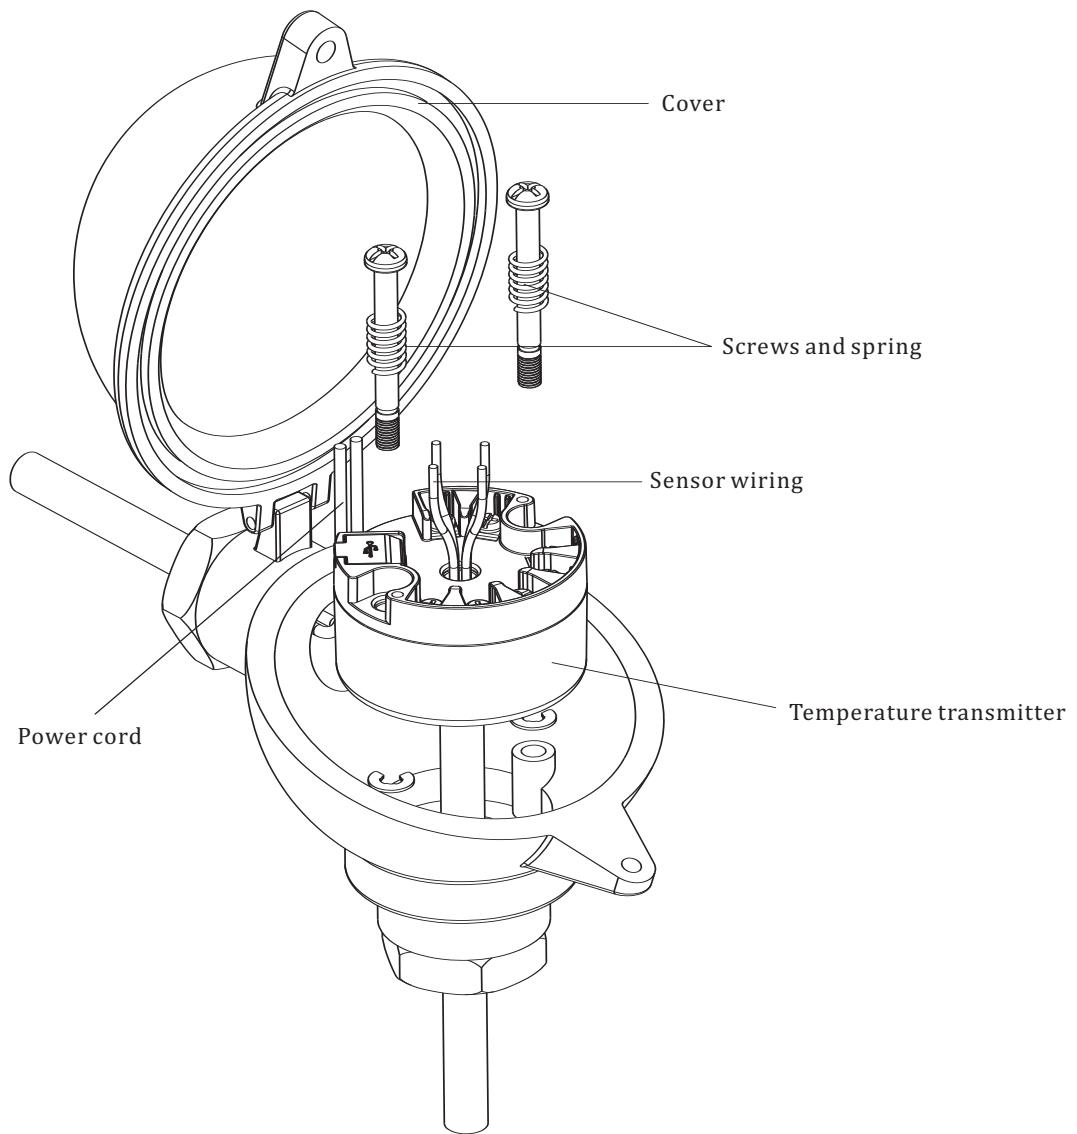

Ordering code

		Model	
	A	Advanced, 2009 version	
	B	Advanced, 2010 version	
		Certification	
	A	Version for non hazardous areas	
	B	NEPSI Ex ia CT4	
		Configuration transmitter connection	
		A	Standard factory configuration 3-wire
		1	Configuration connection TC
		2	Configuration connection RTD(2-wire)
		3	Configuration connection RTD(3-wire)
		4	Configuration connection RTD(4-wire)
		Configuration temperature sensor	
		A	Standard factory configuration Pt100
		1	Pt100 -200°C to 850°C (-328°F to 1562°F)
		2	Pt500 -200°C to 250°C (-328°F to 482°F)
		3	Pt500 -200°C to 250°C (-328°F to 482°F)
		4	Pt1000 -200°C to 250°C (-328°F to 482°F)
		5	Cu50 -50°C to 150°C (-58°F to 302°F)
		6	Cu100 -50°C to 150°C (-58°F to 302°F)
		7	Ni100 -60°C to 180°C (-76°F to 356°F)
		8	Ni500 -60°C to 180°C (-76°F to 356°F)
		B	Type B 0 to 1820°C (-32 to 3308°F)
		E	Type E -270 to 1000°C (-454 to 1832°F)
		J	Type J -210 to 1200°C (-346 to 2192°F)
		K	Type K -270 to 1372°C (-454 to 2501°F)
		N	Type N -270 to 1300°C (-454 to 2372°F)
		R	Type R -50 to 1768°C (-58 to 3214.4°F)
		S	Type S -50 to 1768°C (-58 to 3214.4°F)
		T	Type T -270 to 400°C (-454 to 752°F)
		Configuration	
		A	Standard factory configuration (Pt100/3-wire/0 to 100°C)
		B	Customised measurement range
		C	Customised expanded configuration for TC (see questionnaire)
		D	Customised expanded configuration for RTD (see questionnaire)
TMT191B			Order code (complete)